VALOYA

BL120

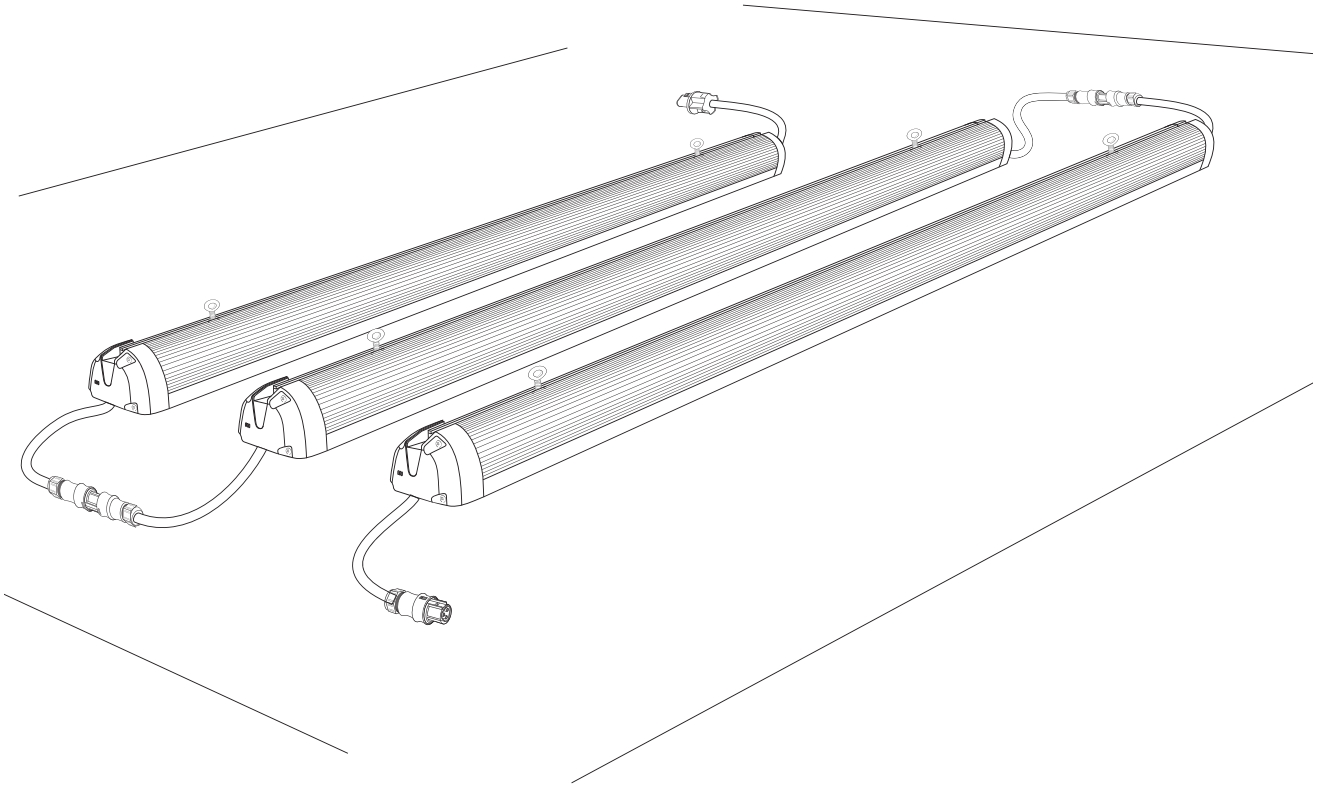

INSTALLATION GUIDE | BL-Series

ENGLISH

CAUTION!

Inappropriate installation may cause injury to persons and damage to the lamp.

DEUTSCH

VORSICHT!

Unsachgemäße Installation kann zu Personen- und Sachschäden führen.

NEDERLANDS

LET OP!

Onjuiste installatie kan schade aan personen of de lamp veroorzaken.

PORTUGUÊS

ATENÇÛO!

A instalaÇÕo inapropriada pode causar danos na luminária e ferimentos nas pessoas.

ESPAÑOL

PELIGRO!

Una instalación inadecuada puede provocar lesiones o daṢar la lámpara.

VLAAMS

LET OP!

Verkeerde aansluiting kan schade veroorzaken aan de lamp of leiden tot lichamelijk letsel aan personen.

.

FRANÇAIS

ATTENTION!

Une mauvaise installation peut Řtre source de blessures corporelles et endommager les lampes.

SVENSKA

AKTA!

Felaktig installation kan leda till skador pŖ personer och lampan.

SUOMI

HUOMIO!

Valaisimen huolimaton asennus voi johtaa henkilön loukkaantumiseen ja valaisimen vioittumiseen.

РУССКИЙ

ОСТОРОЖНО!

Ненадлежащий монтаж может привести к серьезным травмам и повреждению лампы.

日本語

注意！

不適切な取り付けは人の傷害、およびランプの損傷の原因となる場合があります。

ITALIANO

ATTENZIONE!

L’installazione non corretta puṪ causare lesioni alle persone e danni alla lampada.

BEFORE YOU BEGIN

1. Please read this manual thoroughly before use, and retain it for future reference.
2. Due to our continuous program of product development, data is subject to change without notice.
3. Unauthorized product tampering invalidates warranty & is a safety risk.
4. All electrical work must be carried out by qualified persons.
5. Always follow appropriate electrical codes.
6. Disconnect mains power before product installation, connection, or disconnection.
7. Products are fixed luminaires for indoor use (i.e. Install out of reach / Only movable using tools).
8. LED-modules are non-replaceable light sources.
9. Do not use luminaires without LED Drivers (power units) connected (BX-, C-Series).
10. Connect LED drivers to electrical branch circuits (ensure suitable strain relief is fitted).
11. Products with an earth connection must be earthed for safety.
12. Installation of additional electrical circuit protection devices is strongly advised:
    - Type C MCB's (Miniature Circuit Breakers).
    - RCD (Residual Current Device).
    - ICL (Inrush Current Limiter).
    - SPD (Surge Protection Device).
13. Do not high voltage test.
14. Install LED drivers against a flat surface to ensure optimal heat dissipation and lifetime (BX-, C-Series).
15. Do not connect products installed on different mains phases to the same dimming device (dimmable products only).
16. Observe published product temperature specifications and limits.
17. Product surface temperature may become hot to the touch during use.
18. Do not stare directly at any bright light source.
19. As a precaution, use suitable eye protection if working for long periods under high intensity lighting.
20. Dispose of all waste in accordance with local regulations.
21. The external flexible cable of the luminaire is only replaceable by Valoya.
22. For luminaries supplied with open-end supply cables:

    a. Cables should not be concealed or extended through parts of the building structure.

    b. Cables should not be located above a suspended/dropped ceiling, or permanently fixed to the building structure.

    c. Cables must be visible over their full length, not strained, and protected from physical damage.

    d. Cables must be used within their electrical ratings at the maximum temperature of the installed environment.

IMPORTANT

Installation must be carried out by qualified persons, and according to the electrical safety rules & regulations applicable in your country!

CE **RoHS** **PATENTS APPLY**

DELIVERY CHECK

- Please inspect the goods upon receipt to ensure that your delivery is complete.'
- If you detect any damage to the packaging, please notify the carrier immediately and ask them to note that "the delivery was not delivered in good condition".
- If the packaging shows no damage but the goods inside are either missing, defective, or show other signs of damage, please contact us.
- In all cases please take pictures as evidence and contact us as soon as possible by phone or e-mail.

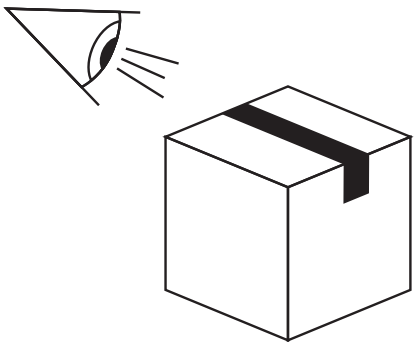

Check package

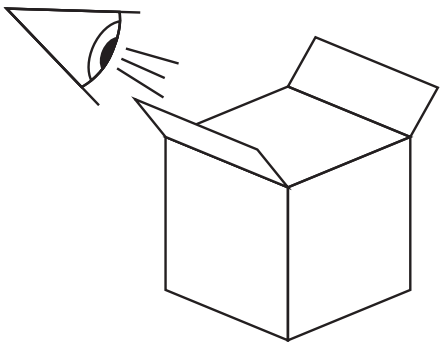

Check content

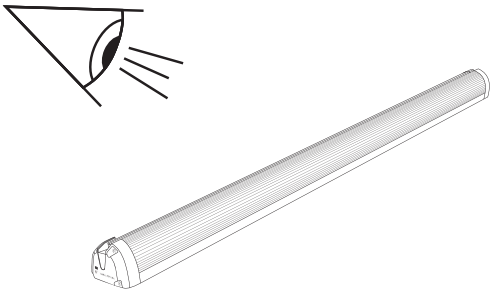

Check operation

If problems, contact us

PART IDENTIFICATION

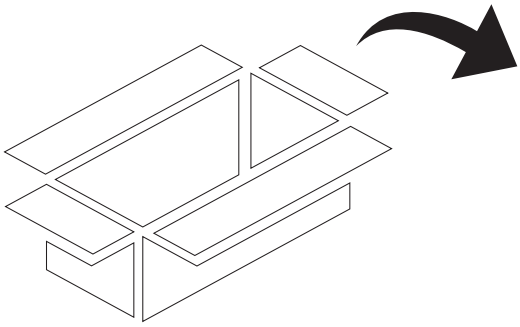

A

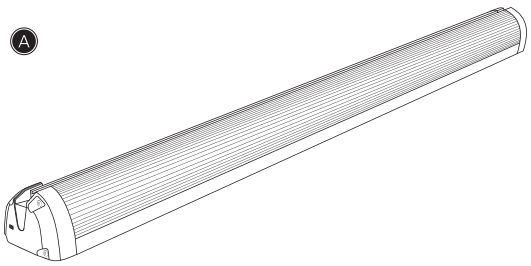

B



C



D



E



F



- A Luminaire
- B Standard hangers (x2)
- C Optional hangers (x2) - ordered separately
- D Mains input mating connector (field installable) - ordered separately
- E Connector end-cap (field installable) - ordered separately
- F Optional extension cable 1m or 2m (order separately)

Technical Specifications

	SPECIFICATIONS	BL120
Electrical	Input voltage, nominal (VAC)	220 - 240
	Power (W)	125
	Input current (A)	0.5 - 0.8
	Frequency (Hz)	50 / 60
	Power Factor	> 0.95
	Luminaire Insulation Class	Class I: For Fixed Installations (protective earth required)*
	16A Type-C MCB load (max.@ 230VAC)	16 (more details at Electrical Recommendations, page 11)
	Interconnection (max.#)	16 (BL version only)
	Dimmable (Acc. to IEC 60929 Annex E)	No
	AC mains plug fitted	No
Optical	Efficiency, 380-820nm (PBPF)	Up to 2.1 µmol/J (Spectrum dependent)
	Light output (µmol/s)	260 (Spectrum dependent)
	Light intensity decay, Q90 / L90 (hours)	36000
	Typical use life, Q90 / L70 (hours)	50000
Environmental	Operational ambient temperature range (°C/°F)	0...+35 / +32...+95
	Max. allowed luminaire housing (tc) temperature (°C/°F)	+65 / +150
	Minimum distance from plants (mm/in)	100 / 4
	Maximum Relative Humidity (%)	90 (non-condensing)
	Storage temperature (°C/°F)	-20...+40 / -4...+104
	Ingress Protection (IP) rating	IP 66
	Cooling method	Passive cooled
Packaging	Luminaire weight (kg/lb)	3.2 / 7.1
	Pieces per box (luminaire / PSU)	3
	Box length (mm/in)	1450 / 57
	Box width (mm/in)	260 / 10.2
	Box height (mm/in)	75 / 3
	Box weight (kg/lb)	10.3 / 22.7
Regulations & Approvals	CE marked	X
	RoHS compliant	X
	EMC directive compliant	X
	Low Voltage Directive compliant	X
	Eco-design (EuP) directive compliant	X
	Certified to UL & CSA standards	No
	Warranty	3-year limited warranty (please refer to our terms & conditions for more details)

Notes:

- Electrical values are typical nominal figures (variations may occur due to spectrum, component & production tolerances).
- Due to our continuous program of product development, specifications are subject to change without notice in order to improve spectra, function, performance & reliability.
- Due to manufacturing tolerances, slight variations are possible in cable lengths, weights & package dimensions.

PRODUCT DIMENSIONS

		LUMINAIRE DIMENSION
		BL120
A	Length (mm/in)	1176 mm / 46.3 in
B	Height (mm/in)	58 mm / 2.3 in
C	Width (mm/in)	73.5 mm / 2.9 in
D	Cable length, each end of luminaire (mm/in)	300 mm / 11.8 in

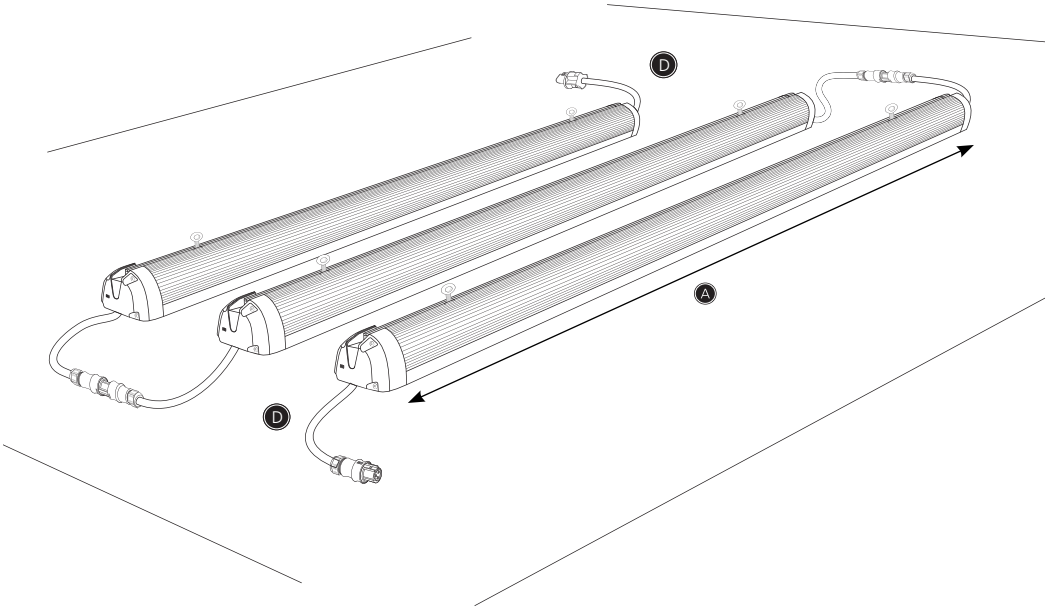



		ACCESSORIES	
STANDARD HANGER (2X)	A	Length (mm/in)	70 mm / 2.8 in
	B	Width (mm/in)	14 mm / 0.6 in
	C	Height (mm/in)	3 mm / 0.1 in
	D	Screw hole	M5 thread
	E	Hanger height (mm/in)	35 mm / 1.4 in
OPTIONAL HANGER (2X)	A	Length (mm/in)	76 mm / 3 in
	B	Width (mm/in)	20 mm / 0.8 in
	C	Height (mm/in)	70 mm / 2.8 in
	D	Hole diameter (mm/in)	5 mm / 0.2 in







HANGING METHODS

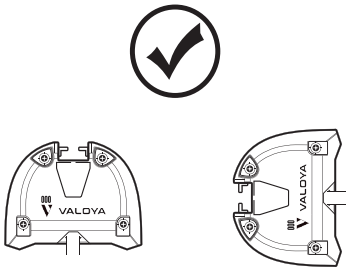

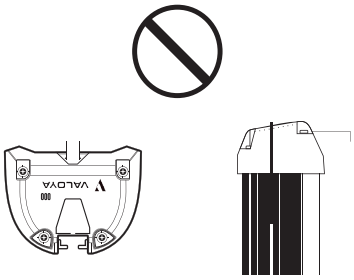

1



2

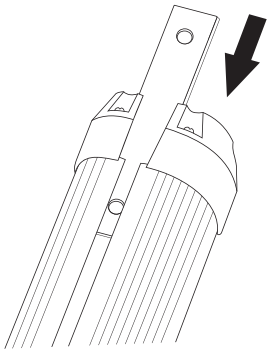

3

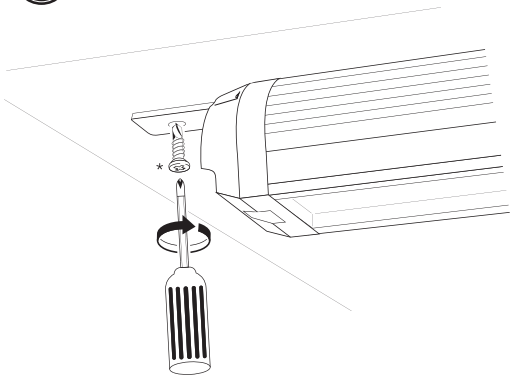

4

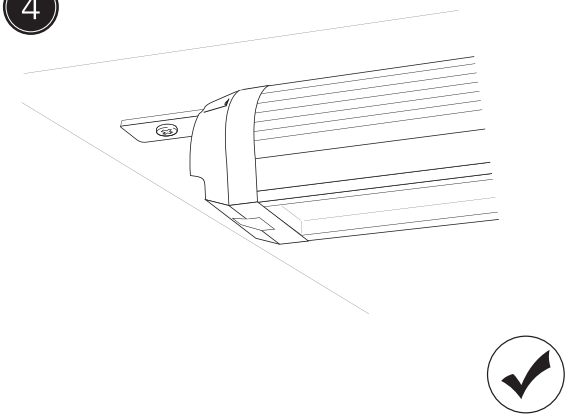

1



2

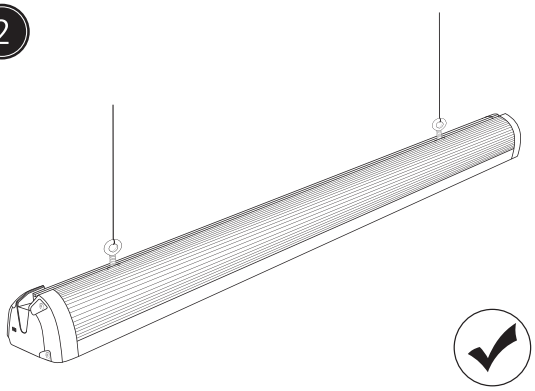

1



2

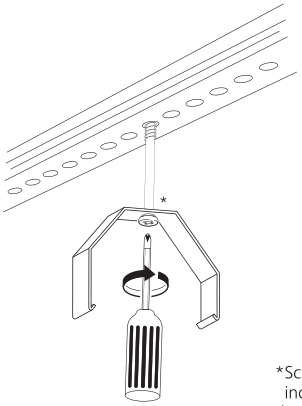

*Screws not included in the package

3

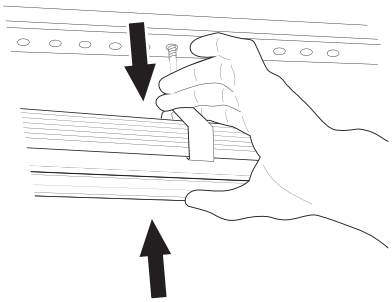

4



IMPORTANT:

Maximum 16 luminaires to be connected to one 16A Type C MCB. Higher rated MCB use is not permitted. Use of an incorrectly rated MCB will cause a potential safety risk and invalidate product warranty. Valoya are not liable for any damage or injury sustained through incorrect electrial connection. Failure to install the end-cap to the lest luminaire will compromise the luminaire IP rating and invalidate warranty.

No other devices should be connected to the LED luminaire circuitry, e.g. HPS lights should not be connected together with LED lights to the same circuit.

ELECTRICAL CONNECTION PROCEDURE

Wieland mains input connector connection

Connect your incoming mains cable to the Wieland RST female connector (ZHPF8144) as shown below.

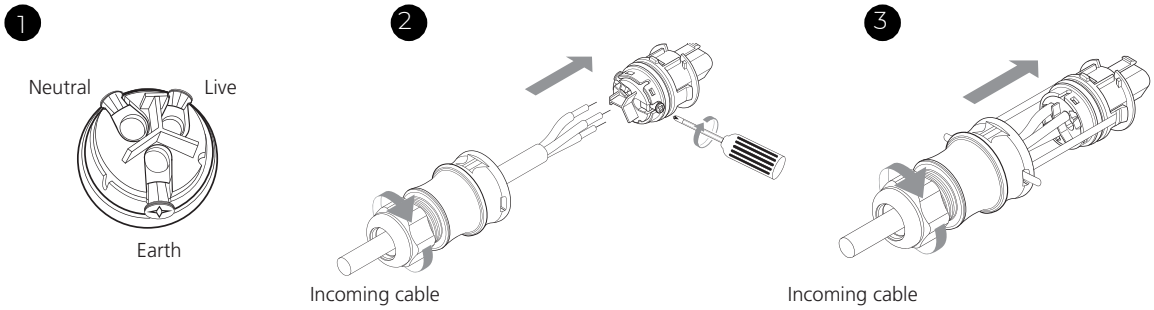

Luminaire Connection

1) Connect luminaire together by plugging the female connector from one luminaire to the male connector of the next luminaire. **Do not connect more than 16 luminaires together!**
2) Connect the end-cap (ZHPF8148) to the female connector of the last luminaire of the chain.
3) Connect your mains lead to the first luminaire in the chain.
4) Connect to the main supply.

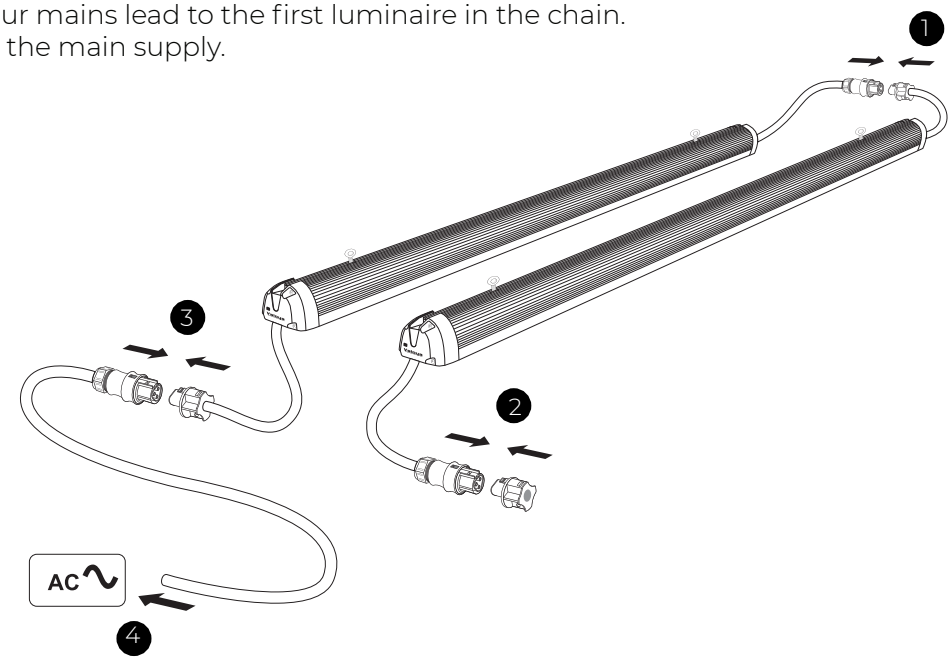

The BL-series can be linked together up to a maximum quantity of 16 luminaires. Each luminaire chain will require one (1) Wieland RST female mating connector to enable connection of a mains input cable, and one (1) blank end-cap to protect and seal the last connector of the chain. These additional components are sold separately by Valoya:

- *1x Wieland RST female connector (Valoya code: ZHPF8144. Wieland code: 96.031.4053.1)*
- *1x Wieland RST end-cap (Valoya code: ZHPF8148. Wieland code: Z5.564.4553.1)*

INRUSH CURRENT

This is the initial current surge drawn during product start-up. Total inrush current rises as the circuit load increases and is one factor that can contribute to nuisance tripping of circuit breakers (MCB's). Practical performance will be affected by the MCB load, MCB tripping characteristics, site wiring impedance, and the angle of the AC mainscycle at the specific moment power is applied.

Nuisance tripping issues may be improved by:

- Reducing the quantity of LED drivers connected to a single MCB.
- Re-distributing the load over multiple mains phases.
- Using an MCB with Type C (EN 60898) tripping characteristics.
- Installing additional inrush current limiting devices.
- Installing a zero crossing relay for powering up the LED drivers.

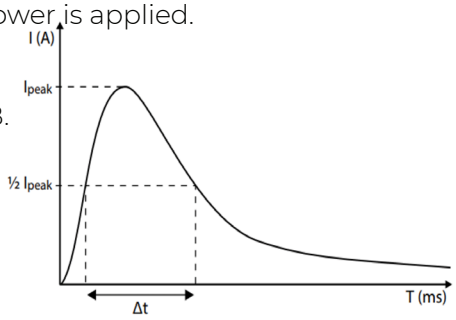

Example of a typical inrush current graph

MCBS (MINIATURE CIRCUIT BREAKERS)

Valoya only recommend using MCB's with "Type C" trip characteristics according to EN 60898.

The maximum quantity of Valoya products recommended for a 16A Type C MCB is stated on the product's technical specifications datasheet (e.g installation guide). This quantity is used as the 100% reference in the table below. The table is provided as a tool to enable calculation of the approximate maximum load for different MCB types and ratings. Installation wiring rating, impedances and mains switch-on angle variations may also influence the actual practical limit.



MCB example

20A branch circuit is the maximum allowed per UL certification according to LED Drivers UL Conditions of Acceptability.

MCB TYPE	Rating (A)	Relative quantity (%)
B	10	37
	16	60
	20	75

MCB TYPE	Rating (A)	Relative quantity (%)
C	10	62
	16	**100 (Ref.)**
	20	125

ICL (INRUSH CURRENT LIMITER)

An ICL can help avoid nuisance MCB tripping and can be installed between the MCB and the load. It also enables an increase the luminaire quantity up to the maximum RMS current limit of the Inrush Current Limiter.



ICL example

RCDS (RESIDUAL CURRENT DEVICES)

An RCD is a protective safety device used to automatically disconnect the electrical supply when an imbalance is detected between live conductors. Requirements for use, and the needed RCD rating, will vary depending on the type of installation. Valoya luminaires are designed to be installed in fixed electrical installations where no plug is permitted for connecting the luminaire to the mains supply.



SURGE PROTECTORS

Valoya LED drivers have built-in surge protection. However, to protect against surge peaks above 4KV (e. g. due to a lightning strike) we recommend the installation of transient voltage surge suppression.



3-PHASE SUPPLIES

- Do not apply power without the Neutral connected.
- Ensure the supply is off before disconnecting the Neutral.
- To avoid erratic dimming or possible product damage, do not connect the same dimmer or controller to luminaires supplied by different mains phases.



INSULATION RESISTANCE/ ELECTRIC STRENGTH TESTING

- Valoya products have been fully tested during manufacture. There is no need to test again.
- If the electrical site wiring must be tested, test with the luminaires and LED drivers disconnected from the mains supply.
- If luminaires and LED drivers are connected to the mains supply during the test, all Live phases and Neutral must be connected together before the test is carried out (Remember to check correct reconnection before reapplying the mains supply).

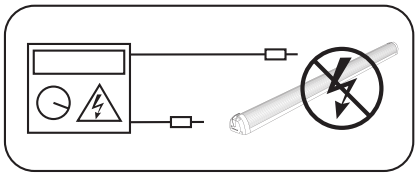

CLEANING

Switch the supply OFF



Allow to cool



Do not use detergent

Clean with a soft brush

Wipe with soft clothes

Suitable for spray cleaning with water



BASIC FAULT FINDING

Lighting faults can be caused by a rare product defect, connection error, lack of supply voltage, or other external factor.

- Switch off the mains supply and disconnect the luminaire (unplug the Wieland input connector).
- Connect the luminaire to a mains supply circuit known to be providing voltage.
- If the problem remains, then the luminaire may be damaged.
- If the luminaire now works, then there is either a connection error in the original mains supply circuit, or no voltage is being provide from the original mains supply circuit.
- Note details of the problem (product type, quantity, problem description...) and contact Valoya for further assistance.

If a problem reoccurs or affects many products at the same time, please contact Valoya for further advice and assistance.

WARRANTY

Products are covered by a limited warranty. Warranty starts from date of installation, but latest 3 months from the delivery date.

The warranty offered is “Return-to-Base”, meaning suspected faulty items shall be returned to Valoya for fault and warranty validation before any repair or replacement can be agreed.

Valoya warrants that each Product will be free from defects in material and workmanship for the duration of the warranty period as long as the products are installed and used in accordance with our published specifications and recommendations.

Warranty shall be void in the event any repairs or alterations not duly authorized by Valoya in writing are made to the Product by any person.

CLAIMS

Before returning a suspected faulty item, please contact Valoya **(www.valoya.com/support)** to give details of the issue and obtain a Return Material Authorization (RMA) reference number. Please be prepared to provide the following information about the issue:

- Product model information (e.g. B200 NS1).
- Product serial number plus YF or XF code.
- Quantity showing problems.
- Detailed problem description.
- Photograph or video showing the issue (if possible).
- Installation / invoice date (if known).

After receiving an RMA number, Products should be suitably packed and the package or shipping paperwork clearly marked with the RMA number. Returns received without an RMA reference number may be rejected.

Valoya will inspect the returned items to validate fault and warranty validity. If Valoya determines to its satisfaction that warranty is valid, Valoya will repair or replace the Product with one of similar age. Where a warranty claim is justified, Valoya will pay for the return freight expenses for repaired or replaced items. Valoya reserve the right to invoice for returning Products that are not found to be defective, or do not comply with the terms of this warranty, together with associated freight, testing and handling costs.

*** Above is a summary of our warranty and claim policy. For full details please see: www.valoya.com/warranty.**

Standards applied (where applicable)**:**

EUROPE

EN60598-1: Luminaires. General requirements and tests.
EN60598-2-1: Luminaires. Part 2: Particular requirements. Section one – Fixed general purpose luminaires.
EN62031: LED modules for general lighting. Safety specifications.
EN 62493: Assessment of lighting equipment related to human exposure to electromagnetic fields.
EN55015: Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN61547: Equipment for general lighting purposes. EMC immunity requirements.
EN61000-3-2: Electromagnetic compatibility - Limits - Limits for harmonic current emissions.
EN61000-3-3: Electromagnetic compatibility – Limits - Limits for Voltage Fluctuations and Flicker.
IEC EN 61000-4-2: Electromagnetic compatibility (EMC)- Part 4-2: Testing and measurement techniques - electrostatic discharge immunity test.
IEC EN 61000-4-3: Electromagnetic compatibility (EMC)- Part 4-3: Testing and measurement techniques - radiated, radio-frequency, electromagnetic field immunity test.
IEC EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test.
IEC EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test.
IEC EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields.
IEC EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test.
IEC EN 61000-4-11: Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests.
IEC 61347-2-13: Lamp controlgear. Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules.
IEC 61347-1: Lamp controlgear - Part 1: General and safety requirements.
IEC 62384: DC or AC supplied electronic control gear for LED modules. Performance requirements.
EN62471: Photobiological safety of lamps and lamp systems.
EN62560: Self-ballasted LED-lamps for general lighting services by voltage >50V - Safety specifications.
EN62776: Double-capped LED lamps designed to retrofit linear fluorescent lamps - Safety specifications.

NORTH AMERICA

UL1598: Luminare safety.
UL8750: Light Emitting Diode (LED) equipment for use In lighting products.
UL2108: Standard for Low Voltage Lighting Systems.
UL 8800: Outline of Investigation for Horticultural Lighting Equipment
CSA C22.2: #9.0: General Requirements for Luminaires.
CSA C22.2: #250.0.8: Safety for Light emitting diode (LED) equipment for lighting applications.
CSA C22.2 No. 250.13-14: Light Emitting Diode (LED) equipment for use in lighting products.

Contact:

Mekaanikonkatu 1,
00880 Helsinki,
Finland

T +358 29 3700 670
E sales@greenlux.com
W www.valoya.com

Distributor list can be found at:
www.valoya.com/contact

Valoya is a part of Greenlux Lighting Solutions!

greenlux

Valoya® is a registered trademark of Valoya Oy in the European Community, the USA and certain other countries.

Due to our continuous program of product development, data is subject to change without notice.